


TRIGGER ELECTRONICS BURST-FET


FEATURES

- Manually Adjusted Burst Timer
- Full MOSFET Trigger Protection
- Rated for 7.4 V–14.8 V Batteries
- Included: BURST-FET with all necessary wires, 2x motor connectors
- ON/OFF Active Brake
- ON/OFF Burst selection

CONTROL CENTER

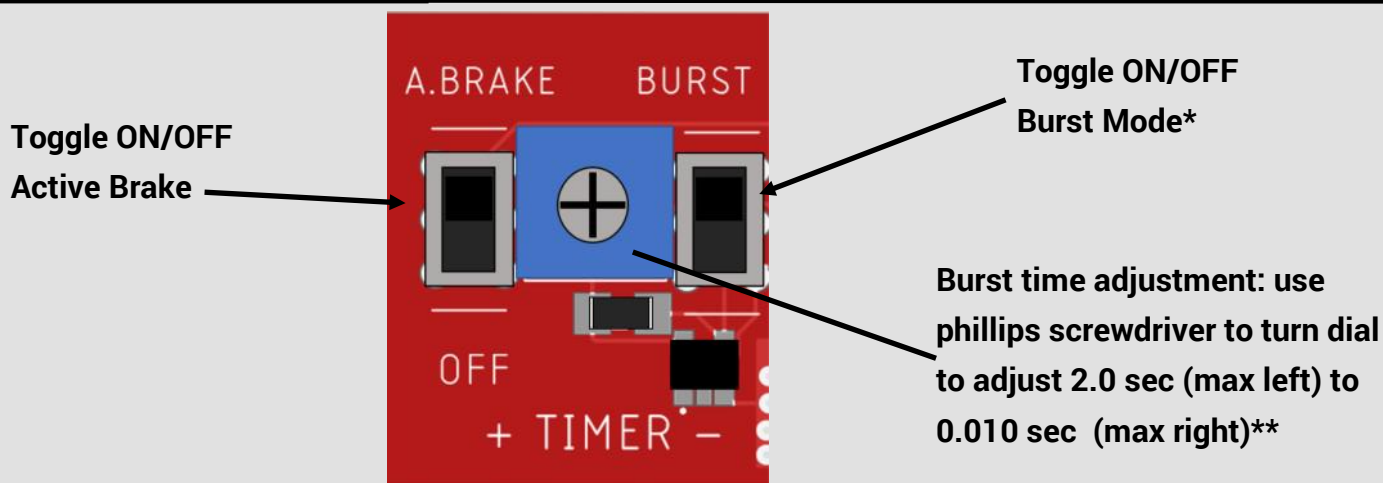

INSTALLATION

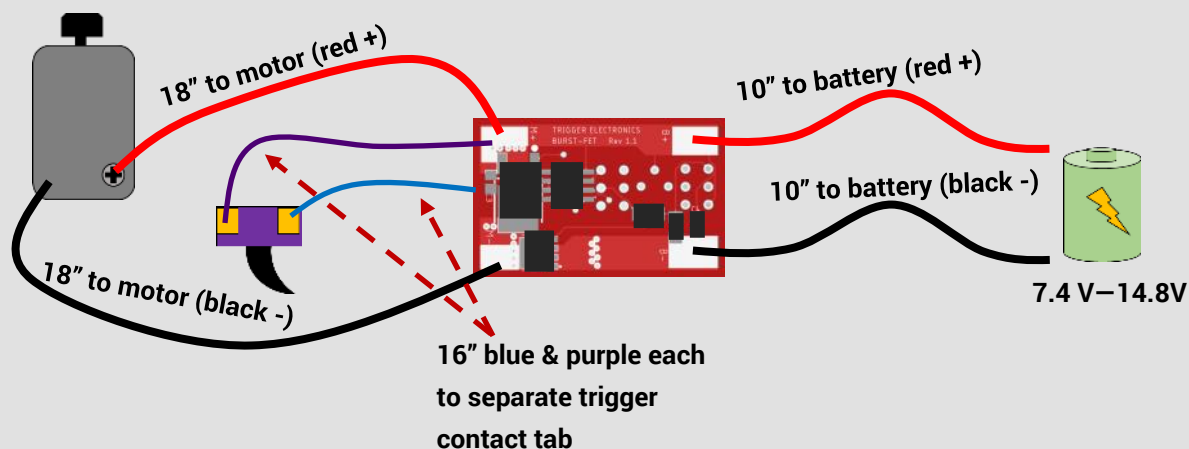

* Semi=Burst, Auto Tap=Burst, Auto Hold=Full Auto. Using on semi-auto may increase cut off lever wear.

**To conserve battery power, it is recommended to turn burst timer to the lowest setting when not using.

Questions or concerns? Email us: help@triggerelectronics.com